



同軸電纜 COAXIAL CABLE

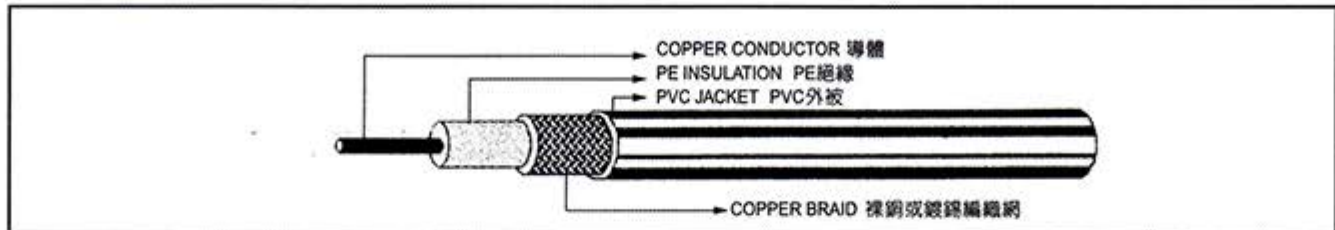

CABLE TYPE	CONDUCTOR		INSULATION		BRADING SHIELD				JACKET	
	MATERIAL	No/mm	MATERIAL	NOMINAL OD (mm)	INNER SHIELD		OUTER SHIELD		MATERIAL	NOMINAL OD (mm)
					MATERIAL	CONSTRUCTION	MATERIAL	CONSTRUCTION		
產品編號	導體構造		絕緣材質	芯線外徑	內層編織		外層編織		外被材質	完成外徑
1.5C-2V	BC	1/0.26	A	1.6	BC	16/5/0.1	-	-	PVC	2.9±0.4
1.7C-2V	BC	1/0.26	A	1.7	BC	16/5/0.12	-	-	PVC	3.2±0.5
2.5C-2V	BC	1/0.4	A	2.4	BC	16/6/0.12	-	-	PVC	4.0±0.5
3C-2V	BC	1/0.5	A	3.1	BC	16/6/0.14	-	-	PVC	5.4±0.5
3C-2W	BC	1/0.5	A	3.1	BC	16/6/0.14	BC	16/6/0.14	PVC	6.5±0.5
5C-2V	BC	1/0.8	A	4.9	BC	16/8/0.14	-	-	PVC	7.4±0.5
5C-2W	BC	1/0.8	A	4.9	BC	16/8/0.14	BC	16/8/0.14	PVC	8.3±0.5
7C-2V	BC	7/0.4	A	7.3	BC	24/8/0.18	-	-	PVC	10.4±0.5
10C-2v	BC	7/0.5	A	9.4	BC	24/10/0.2	-	-	PVC	13.1±0.6
10C-2W	BC	7/0.5	A	9.2	BC	24/10/0.2	BC	24/10/0.2	PVC	14.2±0.6
20C-2V	BC	1/2.9	A	19.0	BC	32/10/0.26	-	-	PVC	24.1±0.6
1.5D-2V	BC	7/0.18	A	1.6	BC	16/5/0.10	-	-	PVC	2.9±0.4
2.5D-2V	BC	7/0.8	A	2.7	BC	16/7/0.12	-	-	PVC	4.3±0.5
3D-2V	BC	7/0.32	A	3.0	BC	16/6/0.14	-	-	PVC	5.3±0.5
3D-2W	BC	7/0.32	A	3.0	BC	16/6/0.14	BC	16/6/0.14	PVC	6.4±0.5
5D-2V	BC	1/1.4	A	4.8	BC	16/8/0.14	-	-	PVC	7.3±0.5
5D-2W	BC	1/1.4	A	4.8	BC	16/8/0.14	BC	16/8/0.14	PVC	8.2±0.5
8D-2V	BC	7/0.8	A	7.8	BC	24/8/0.18	-	-	PVC	11.1±0.5
8D-2W	BC	7/0.8	A	7.8	BC	24/8/0.18	BC	24/8/0.18	PVC	12.5±0.6
10D-2V	BC	1/2.9	A	9.7	BC	24/10/0.2	-	-	PVC	13.1±0.6
20D-2V	BC	1/6.0	A	20.9	BC	32/10/0.26	-	-	PVC	26.1±0.6

同軸電纜 COAXIAL CABLE

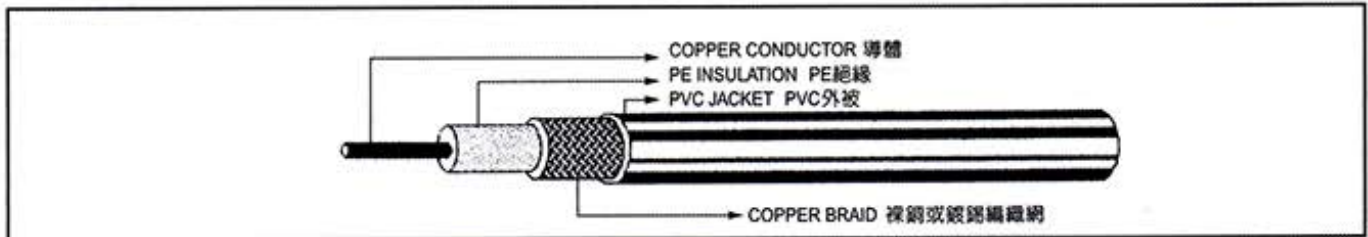

CABLE TYPE	CONDUCTOR CONSTRUCTION	MAXIMUM CONDUCTOR RESISTANCE	MIN INSULATION RESISTANCE	AC VOLTAGE WITHSTANDING	NOMINAL CAPACITANCE	NOMINAL IMPEDANCE	STANDARD ATTENUATION	VELOCITY OF PROP. (%)
	No/mm	Ω /Km	M Ω /Km	Kv/Min.	1kHz nF/kM	10MHz Ω	10MHz dB/km	10MHz %
產品編號	導體構造	最大導體電阻	最小絕緣電阻	絕緣耐壓	靜電容量	特性阻抗	標準衰減量	波長縮短率
1.5C-2V	1/0.26	968	1,000	1	69±4	75±3	96	66±2
1.7C-2V	1/0.26	968	1,000	1	69±4	75±3	96	66±2
2.5C-2V	1/0.4	145	1,000	1	69±4	75±3	52	66±2
3C-2V	1/0.5	91.4	1,000	1	67±3	75±3	42	66±2
3C-2W	1/0.5	91.4	10,000	1	67±3	75±3	42	66±2
5C-2V	1/0.8	35.9	1,000	1	67±3	75±3	27	66±2
5C-2W	1/0.8	35.9	10,000	1	67±3	75±3	27	66±2
7C-2V	7/0.4	20.7	1,000	1	67±3	75±3	22	66±2
10C-2V	7/0.5	13.1	1,000	1	67±3	75±3	18	66±2
10C-2W	7/0.5	13.1	10,000	1	67±3	75±3	18	66±2
20C-2V	1/2.9	2.67	1,000	1	67±3	75±3	7.4	66±2
1.5D-2V	7/0.18	110	1,000	0.3	100±5	50±2	85	66±2
2.5D-2V	7/0.8	35.9	1,000	0.3	100±5	50±2	45	66±2
3D-2V	7/0.32	33.3	1,000	0.3	100±4	50±2	46	66±2
3D-2W	7/0.32	33.3	10,000	0.3	100±4	50±2	46	66±2
5D-2V	1/1.4	11.7	1,000	0.3	100±4	50±2	27	66±2
5D-2W	1/1.4	11.7	10,000	0.3	100±4	50±2	27	66±2
8D-2V	7/0.8	5.13	1,000	0.3	100±4	50±2	20	66±2
8D-2W	7/0.8	5.13	10,000	0.3	100±4	50±2	20	66±2
10D-2V	1/2.9	2.67	1,000	0.3	100±4	50±2	14	66±2
20D-2V	1/6.0	0.662	1000	0.3	100±4	50±2	6.6	66±2